


V-9964 TO V-2006A CONNECTIONS

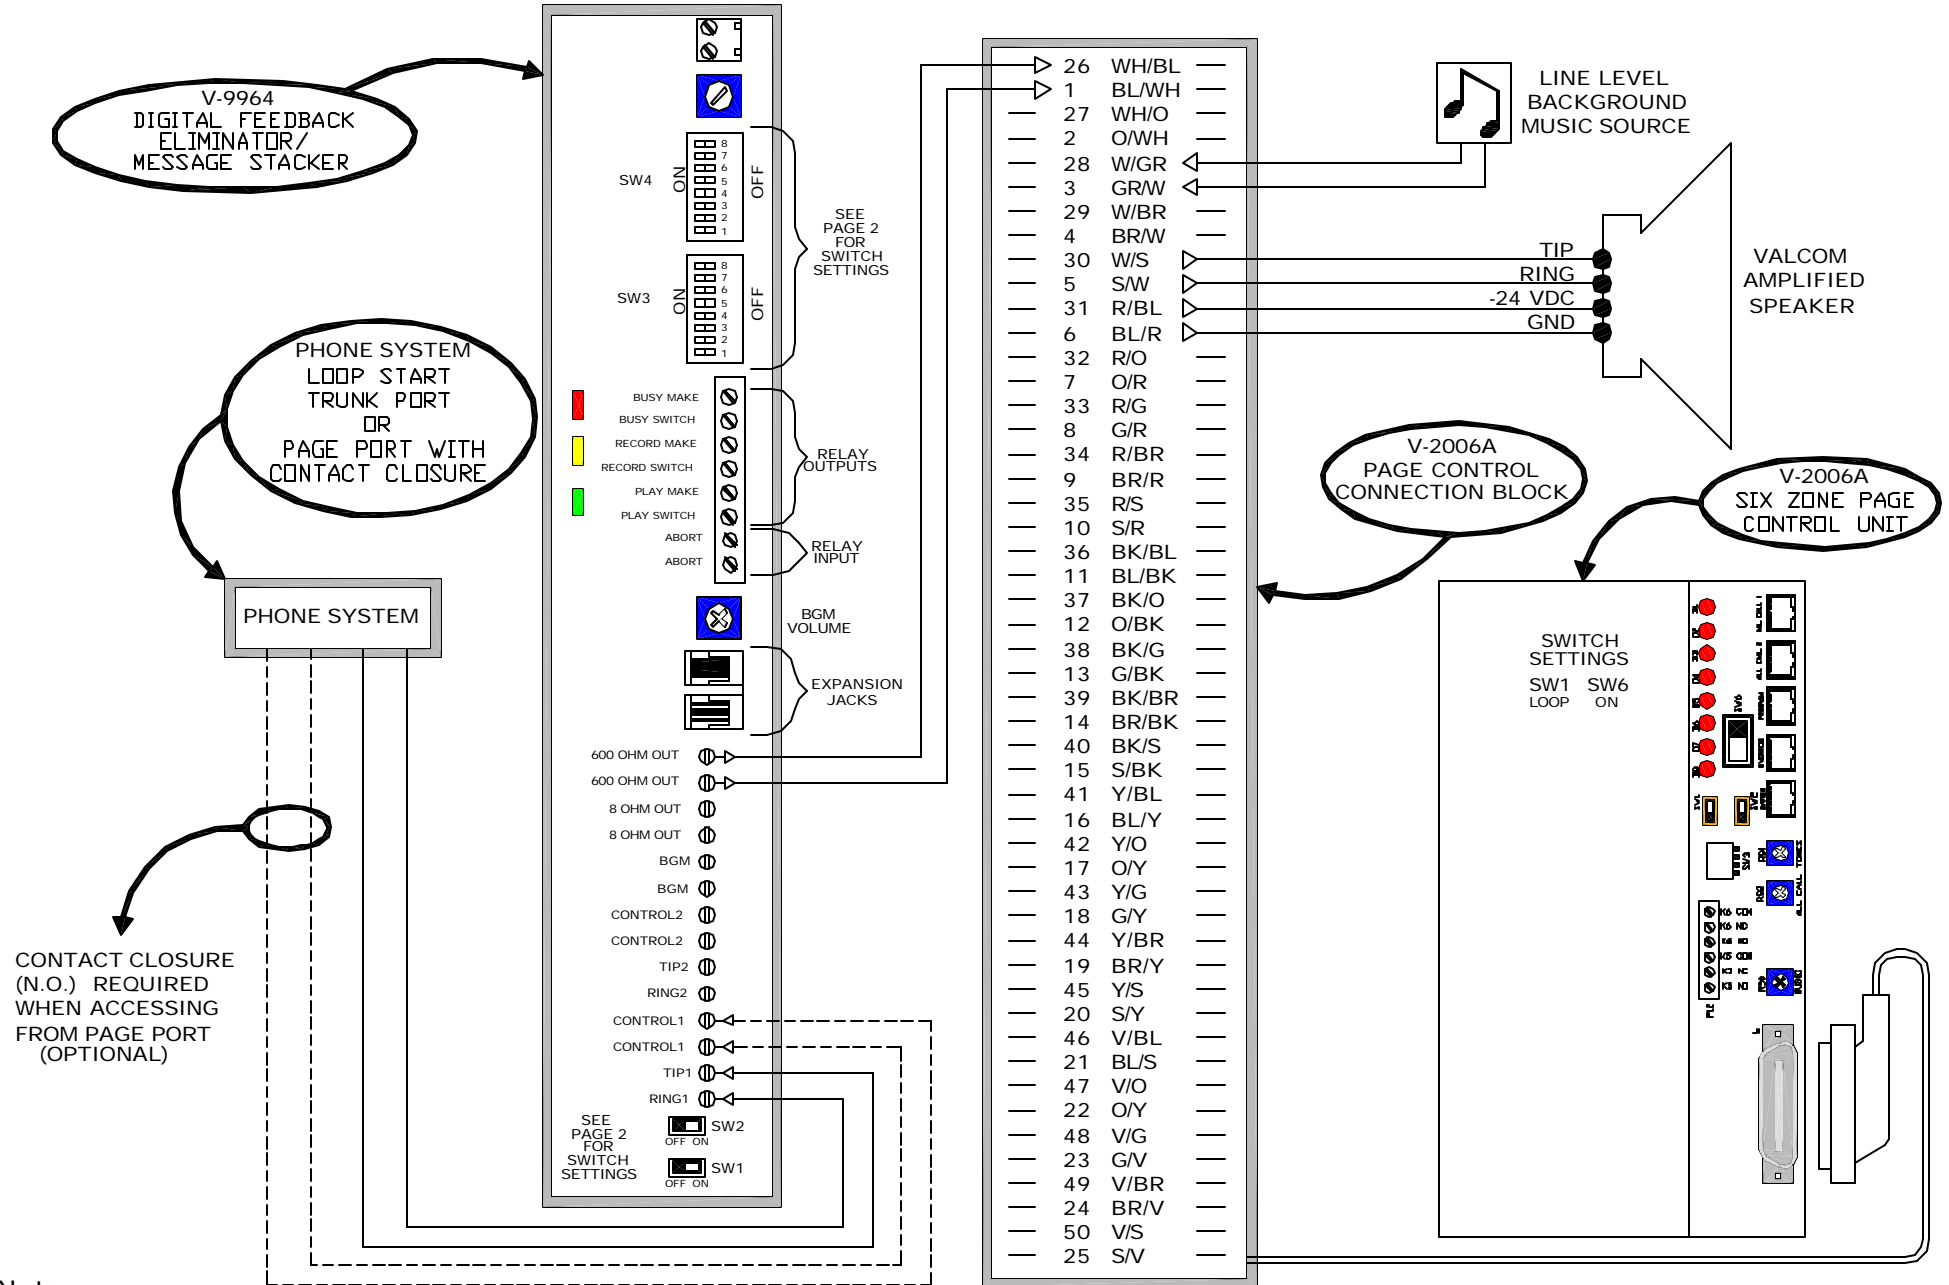

Note:

The suggestion provided may or may not be suitable for your intended application. Please consider this information carefully before incorporating it into your system design. Valcom disclaims any responsibility for accuracy or completeness.

VALCOM 5614 Hollins Road
Roanoke, VA 24019
540-563-2000
support@valcom.com

T9964>2006A

Switch Options

SW4

	ON	OFF
8 System Setup	Single/Master Unit	Slave Unit
7 NOT USED	_____	_____
6 NOT USED	_____	_____
5 NOT USED	_____	_____
4 System Mode	Call Stacker	Input 2 Overrides 1
3 Pre-Record Tone	No Tone	Pre-Record Tone
2 Input 2	AUDIO DETECT	LOOP DETECT
1 Input 1	AUDIO DETECT	LOOP DETECT

SW3

	ON	OFF
8 Inter Page Timing	3 Seconds	1 Second
7 Alert Tones	See Chart 2	See Chart 2
6 Alert Tones	See Chart 2	See Chart 2
5 Message Play	Play Twice	Play Once
4 Input 2 Play Options	Realtime Play	Record & Play
3 Record Digits	See Chart 1	See Chart 1
2 Record Digits	See Chart 1	See Chart 1
1 DTMF Options	DTMF Record	NO DTMF Record


Fuse: 225 - 2AG
1/2 Amp 250 V

POWER ON LED

SYSTEM BUSY LED

PRECORDING LED

PLAYING LED



POWER INPUT
(-) -24 VDC
(+) Ground

SW5



VOX SENSITIVITY

SW4

On



Off

SW3

On



Off

OPTION SWITCHES

BSYMK



BUSY MAKE

BSYSW



BUSY SWITCH

RECMK



RECORD MAKE

RECSW



RECORD SWITCH

PLYMK



PLAY MAKE

PLYSW



PLAY SWITCH

ABORT



ABORT CLOSURE INPUT

ABORT



ABORT CLOSURE INPUT

CONTACT CLOSURE OUTPUTS

JP2



BACKGROUND MUSIC LEVEL ADJUSTMENT

RJ2 Output



RJ45 for Expansion Output

RJ1 Input



RJ45 for Expansion Input

R77



600 OHM LOOP OUTPUT TO VALCOM PAGE CONTROL UNIT OR OTHER DEVICES



8 OHM OUTPUT TO VALCOM SPEAKERS OR OTHER DEVICES



BACKGROUND MUSIC INPUT



CONTROL 2 - OPTIONAL CONTACT CLOSURE INPUT



RING 2



TIP 2



CONTROL 2 - OPTIONAL CONTACT CLOSURE INPUT



RING 1



TIP 1



JP1



OFF ON



INPUT 2 BATTERY FEED OPTION



INPUT 1 BATTERY FEED OPTION

OFF ON

VALCOM

V-9964

FIGURE 1: CONNECTIONS AND CONTROLS (ACCESSIBLE WITH SIDE PANEL REMOVED)