



V-RDP Installation

Mounting



The V-RDP panel was designed to be mounted in a standard 19" rack.

- Unpack and confirm the contents of the shipping container:
 - One (1) V-RDP panel
 - One (1) AM/FM/CD Radio
 - One (1) VP-1124D power supply
 - One (1) power cord
- Securely attach the V-RDP panel to the desired rack location using four # 10 machine screws (not included).
- Unpack the AM/FM/CD radio and remove the metal mounting sleeve from the radio.
- Insert the mounting sleeve into the V-RDP panel and bend the tabs on the sleeve to secure the sleeve to the V-RDP panel. See Figure 1 and 2.
- Slide the AM/FM/CD radio into the mounting sleeve until it locks into place. See Figure 1.



Connections

- Connect the wiring harness of the V-RDP to the radio. See Figure 3.
- Connect antenna lead to the radio.
- Connect power cord to the VP-1124D.
- Plug the power cord into JP1 of the V-RDP. See Figure 4.
- The V-RDP has output terminations to accept twisted pair wire or audio cables terminated with a RCA phono plug. Choose the appropriate connector for your installation and make your audio connection. See Figure 4.

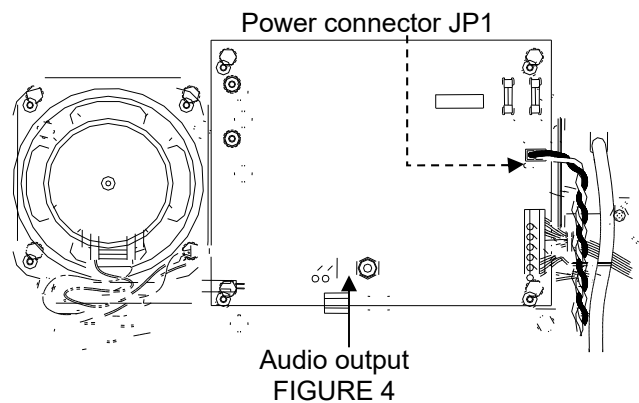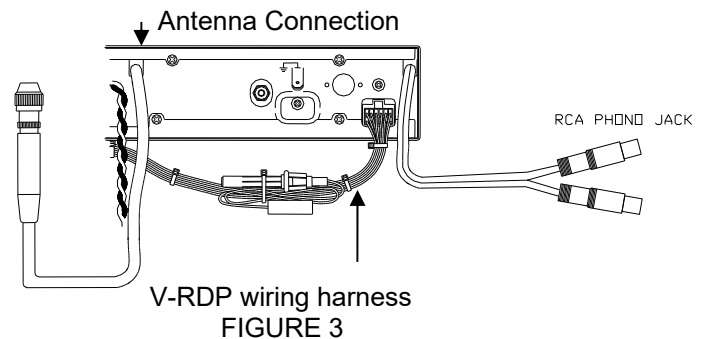

WARRANTY

Warranty information may be found on our website at www.valcom.com/warranty.