

RECESSED ROUND CEILING SPEAKER BACKBOX (V-5335030-5)

Fits back of Recessed Round Ceiling Speaker (V-5330115 & V-5330215). Complies with all fire codes in air plenum applications.

DIMENSIONS/WEIGHT

- 12.3"Dia. x 4.0"H (31.24cm x 10.16cm)
 2.0 lbs. (0.9 kg)
- 1. Cut an eight and one-half inch square hole in ceiling tile using the support bridge as a template.
- 2. Bend up the four horseshoe tabs on the support bridge.
- 3. Position the support bridge on the tile and bend the eight locator tabs into the tile opening.
- 4. Install the UL listed metallic enclosure entry fitting to the knockout to accommodate plenum cable or fitting for conduit.
- 5. Install the enclosure to the bridge by orienting the four enclosure slots over the four horseshoe tabs of the bridge.
- 6. With pliers, twist the four horseshoe tabs on the bridge one-half turn, securing the enclosure to the bridge. (Note: Four slots provided on each enclosure to mate with four twist tabs on support bridge eliminates need for screws.)
- 7. Install the speaker/baffle assembly with the four 8-32 screws. (Screws are provided with the assembly.)
- **Note:** Listed by Underwriters Laboratories, Inc. Category UUMW. Material and construction permits use where ceiling plenum is part of the air handling system.
- **Note**: Compound knockout(s) provided for listed type metallic type fittings for one-half inch and three-quarter inch plenum rated cable and plenum whip flex conduit.
- **Note:** All cable splices and connections to speaker/transformer pigtails must be made inside of listed enclosure.

1

947172

TECHNICAL ASSISTANCE

When calling, have a VOM and a telephone test set available and call from the job site. Call (540) 427-3900 and ask for PagePac Technical Support, or call (540) 427-6000 for Valcom 24-hour Automated Support or visit our websites at http://www.pagepac.com and www.valcom.com.

Should repairs be necessary, attach a tag to the unit clearly stating company name, address, phone number, contact person, and the nature of the problem. Send the unit to:

PagePac[®] Repair Dept. Valcom, Inc. 5614 Hollins Road Roanoke, VA 24019-5056

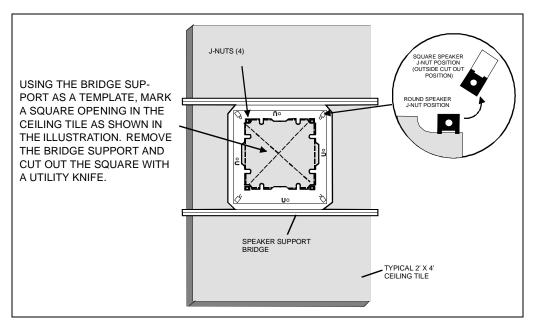


Figure 1

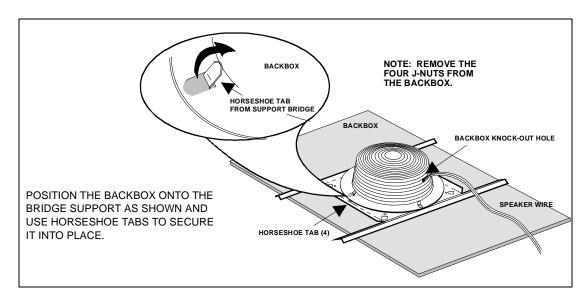


Figure 2

2

947172